



MARK	8	7	6	5	4	3	2	1	
	HISTORY			NAME	DATE	MARK	HISTORY	NAME	DATE
△						△			
△						△			
△						△			
△						△			
△						△			




FRONT VIEW

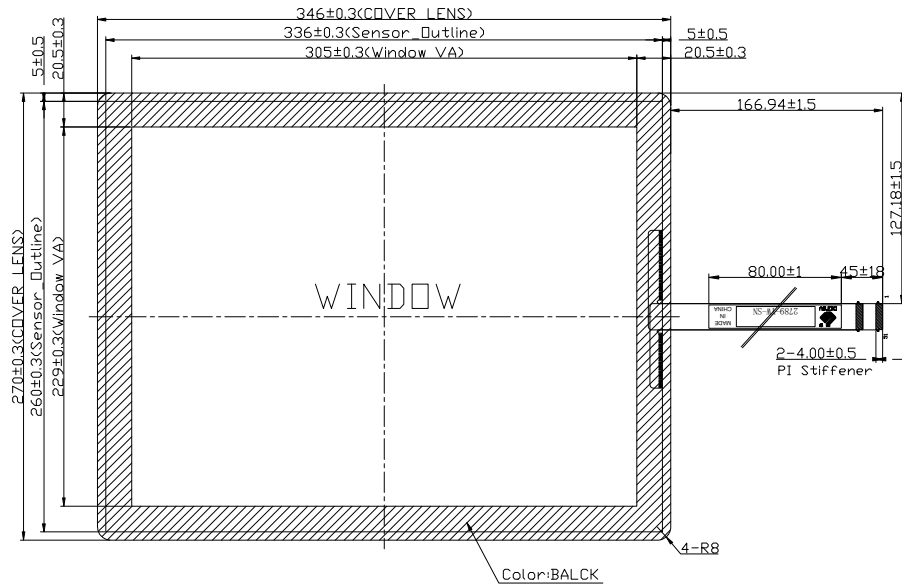

REAR VIEW

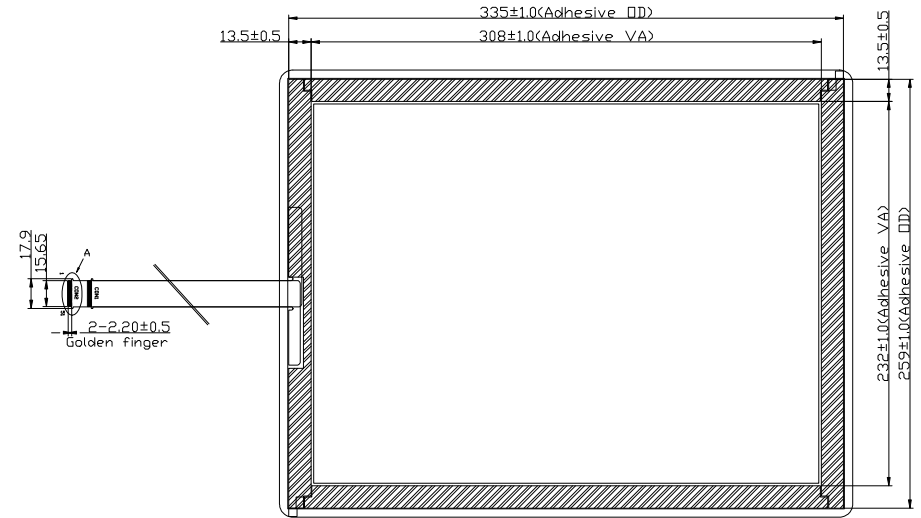

SIDE VIEW

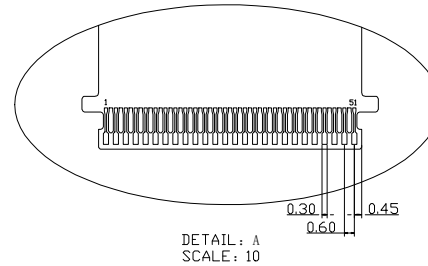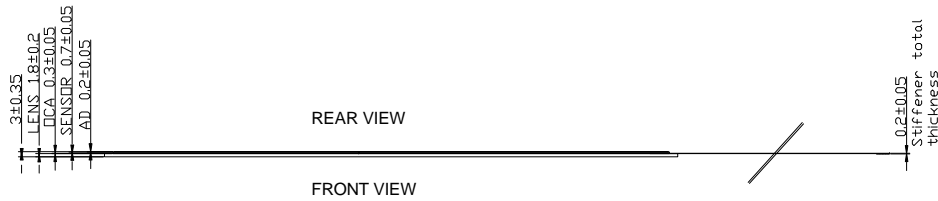

- Notes:
- Operating Temperature: -10°C~+60°C;
Storage Temperature: -20°C~+70°C.
 - Hardness ≥ 7H.
 - Transparency ≥ 85%.
 - Unspecified Tolerance: ±0.3.
 - ROHS Compliance.

PIN ASSIGNMENT	
USB	
Pin	Name
1	VDD
2	D-
3	D+
4	GND
5	GND

PIN ASSIGNMENT			
CON1		CON2	
Pin	Name	Pin	Name
1	GND	1	GND
2~34	TX1-33	2~44	RX1-43
35~50	NC	45~50	NC
51	GND	51	GND

DY1502S-2789		Customer Part No.	SHEET	UNIT	SCALE	ver.1
		15.0 inch	A4	mm	1:1	
DESIGN	yjl	DATE	2016.12.20			
CHECK		DATE				