



MARK	8	7	6	5	4	3	2	1		
	HISTORY			NAME	DATE	HISTORY			NAME	DATE
▲						▲				
▲						▲				
▲						▲				
▲						▲				
▲						▲				


FRONT VIEW

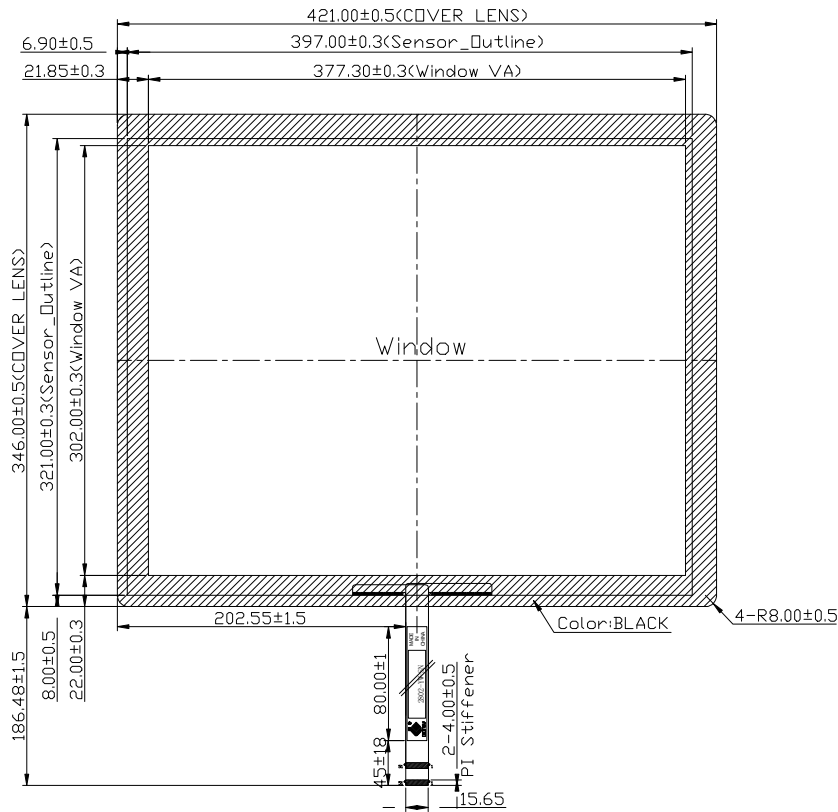



SIDE VIEW

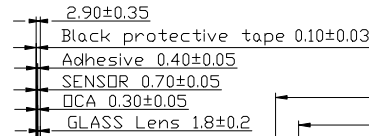

REAR VIEW

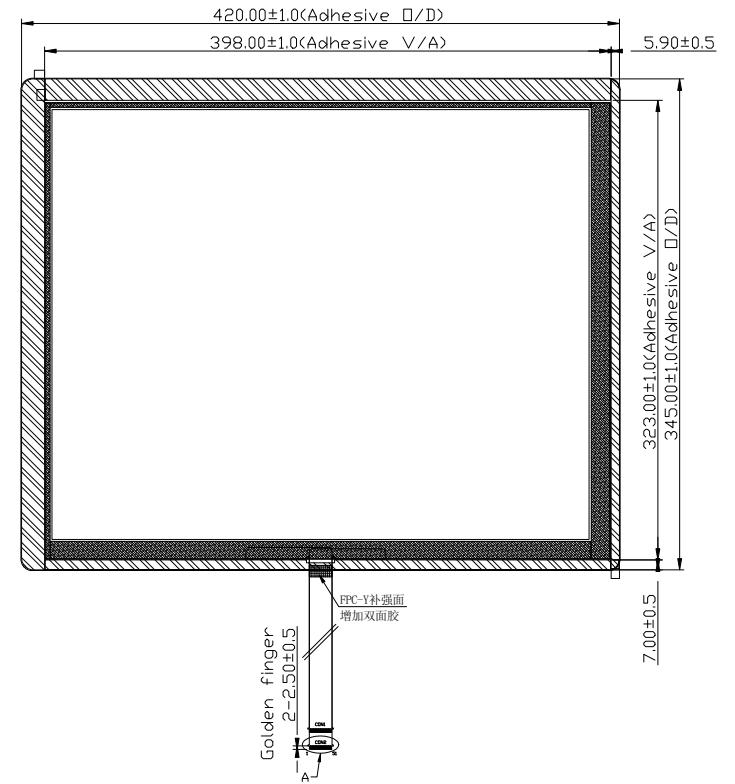

- Notes:
- Operating Temperature: -10°C ~ +60°C;  
Storage Temperature: -20°C ~ +70°C.
  - Hardness ≥ 7H.
  - Transparency ≥ 83%.
  - Unspecified Tolerance: ± 0.3.
  - ROHS Compliance.



PIN ASSIGNMENT				PIN ASSIGNMENT	
CON1		CON2		USB	
Pin	Name	Pin	Name	Pin	Name
1	GND	1	GND	1	GND
2~41	TX1~TX40	2~50	RX1~RX49	2	VDD
42~50	NC	51	GND	3	GND
51	GND			4	D+
				5	D-

DY1902S-2802				Customer Part No.	SHEET	UNIT	SCALE	ver.1
				19.0 inch	A4	mm	1:1	
DESIGN	yjl	DATE	2017.01.05					
CHECK	MURPHY	DATE	2017.01.05					